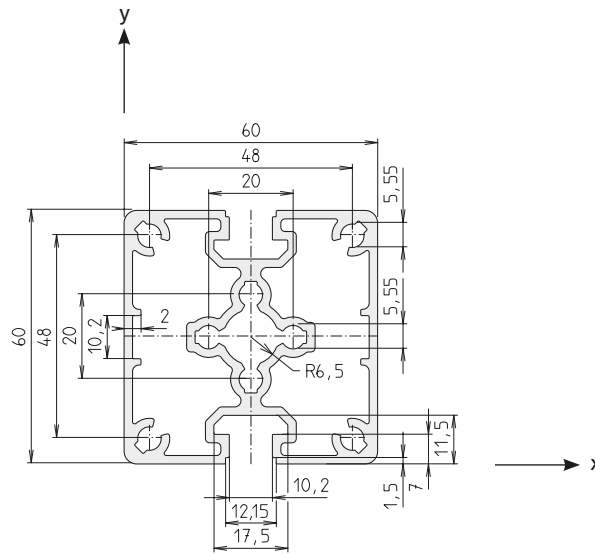
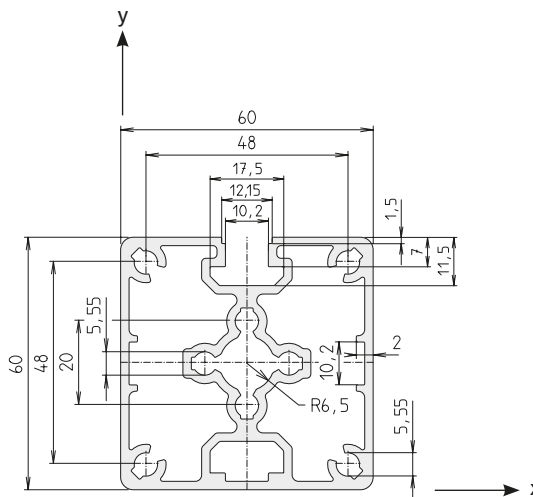


**F-2G 60x60**


Area	956	mm <sup>2</sup>
$I_x$	36.2	cm <sup>4</sup>
$I_y$	39.1	cm <sup>4</sup>
$W_x$	12.1	cm <sup>3</sup>
$W_y$	13.0	cm <sup>3</sup>
Weight	2585	g/m

Code No. Profile F-2G 60x60			Anodised
4A45000	Cut to size	max. 6000 mm	Clear
4A45001	Bar	6000 mm	Clear

Connection	Slot geometry	Flange bracket	lot sizes	Code No.
Long	30	60	10, 20, 30... pcs	4226706
	40	60	10, 20, 30... pcs	4226702

**F-3G 60x60**


Area	981	mm <sup>2</sup>
$I_x$	36.5	cm <sup>4</sup>
$I_y$	41.2	cm <sup>4</sup>
$W_x$	11.9	cm <sup>3</sup>
$W_y$	13.7	cm <sup>3</sup>
Weight	2649	g/m

Code No. Profile F-3G 60x60			Anodised
4A55000	Cut to size	max. 6000 mm	Clear
4A55001	Bar	6000 mm	Clear

Connection	Slot geometry	Flange bracket	lot sizes	Code No.
Flange slot stone -N-	40	60 (N)	-	4A26700